


# LF 1365 W ADVANCED

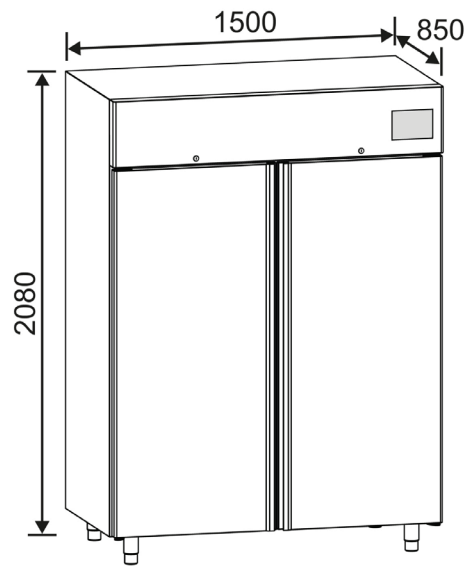

Color: **White**  
Panel: **ADVANCED**

- Touch control panel with 7" display and password
- Data download to USB
- Backup battery for managing alarms in case of power failure
- Audible and visual alarms
- Wi-Fi connection

TECHNICAL FEATURES	
Product Code	AEN651T
Temperature	-5°C / -25°C
Refrigeration Type	Forced air
Defrost Type	Automatic, with heating resistance
Condensate Evaporation	Automatic
Refrigerant Gas	R290
Climatic Class	+16°C / +38°C (ST)
Gross Capacity (liters)	1500
Net Capacity (liters)	1365
External Dimensions (W x D x H mm)	1500 x 850 x 2080
Packaging Dimensions (W x D x H mm)	1560 x 940 x 2240

# LF 1365 W ADVANCED



## ELECTRICAL DATA

Power Supply (V/ph/Hz)	220-230/1/50
Power Plug	Type F

## STRUCTURAL FEATURES

Structure	Upright
External Material	Anti-bacterial coated steel white colour
Internal Material	Stainless steel 18/10 AISI 304
Insulation Thickness (mm)	75
Insulated Door	Yes
Automatic Door Closure	Yes
Heated Door Seal	Yes
Internal Lighting Type	LED lamp under the front panel
Shelves Number	6
Shelf Material	Wire steel with white colour plastic coating
Shelves Dimensions (W x D mm)	530 x 650
Shelf Adjustment Step	13 / 13
Shelf Adjustment Step Range (mm)	89
Maximum Shelf Quantity	13 / 13
Drawers with extractable slides	Optional
Drawer Adjustment Step	13 / 13
Drawer Adjustment Step Range (mm)	89
Maximum Drawer Quantity	13 / 13
Adjustable Steel Feet (from 135 to 160 mm)	4

## CONTROL PANEL

Display Type	Touch 7"
--------------	----------

# LF 1365 W ADVANCED



CONTROL PANEL	
Languages	ITA - ENG - FRA - ESP
Access Password	Yes
3-Level Access Password	Yes
Temperature Graph	Visible on display
Probe Type	Nr. 3 PT1000
Alarm Signaling	Acoustic and visual
Alarm Indications	Text form / codes
Adjustable High/Low Temperature Alarm	Yes
Adjustable Door Open Alarm	Yes
Power Loss Alarm	Yes
Probe Fault Alarm	Yes
Low Battery Alarm	Yes
Dirty Condenser Alarm	Yes
Evaporator Freezing Alarm	Yes
Acoustic Alarm Silencing Options	Yes
Acoustic Alarm Reactivation	Yes
Alarm Functionality Test	Yes
Calibration	Yes
Alarm Memory	Yes
Door Openings Memory	Yes
Defrost Memory	Yes
Event Memory	Yes
Daily Min/Max Temperature Memory	Yes
Data Logger Function with USB Port	Yes
USB Port	Type B
Data and Event Storage	Yes (on internal memory)
Dry Contact	Yes
Wi-Fi Connectivity	Yes

# LF 1365 W ADVANCED



## CONTROL PANEL

Monitoring App	Yes
Backup Battery for Display and Alarms	Yes
Backup Battery Autonomy for Display and Alarms (hours)	48

## ACCESSORIES

Open wire shelf

Stainless steel open wire shelf

Chromium plated open wire basket

Stainless steel drawer

Plastic drawer divider

Drawer Perspex front shield

Castors Ø 95 mm, 2 with brakes

Door key locking

Electronic door lock (available for ADVANCED control panel only)

Temperature chart recorder

Ballasted sensor for simulation of the product temperature alarm (available for ADVANCED control panel only)

Internal electrical socket

Porthole with cover Ø 18 mm

Porthole with cover Ø 45 mm

Internal spark-proofing

Back-up cooling unit (available for ADVANCED control panel only)

Refrigerant R452a

GSM/GPRS telephone dialer

Voltage 230V/1ph/60Hz

Voltage 115V/1ph/60Hz

Plug type A

Plug type B

## ACCESSORIES

Plug type G

Plug type I

Wooden crate packing

IQ Documentation

OQ Documentation

PQ Documentation



**ESSE3** srl, Via Garibaldi 30  
14022 Castelnovo D.B. (AT)  
Tel +39 011 99 27 706  
Fax +39 011 99 27 506  
e-mail: [danielec@esse3-medical.com](mailto:danielec@esse3-medical.com)  
web: [www.esse3-medical.com](http://www.esse3-medical.com)

