


# LF 1365 W LITE

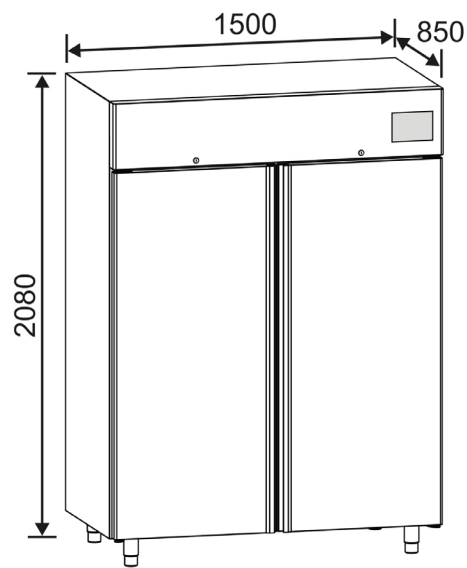

Color: **White**  
Panel: **LITE**

- LED backlit control panel
- Temperature display resolution 0,1°C
- Audible and visual alarms
- Dry contact for alarms signal remoting

TECHNICAL FEATURES	
Product Code	AEN650L
Temperature	-5°C / -25°C
Refrigeration Type	Forced air
Defrost Type	Automatic, with heating resistance
Condensate Evaporation	Automatic
Refrigerant Gas	R290
Climatic Class	+16°C / +38°C (ST)
Gross Capacity (liters)	1500
Net Capacity (liters)	1365
External Dimensions (W x D x H mm)	1500 x 850 x 2080
Packaging Dimensions (W x D x H mm)	1560 x 940 x 2240

# LF 1365 W LITE



## ELECTRICAL DATA

Power Supply (V/ph/Hz)	220-230/1/50
Power Plug	Type F

## STRUCTURAL FEATURES

Structure	Upright
External Material	Anti-bacterial coated steel white colour
Internal Material	Stainless steel 18/10 AISI 304
Insulation Thickness (mm)	75
Insulated Door	Yes
Automatic Door Closure	Yes
Heated Door Seal	Yes
Internal Lighting Type	LED lamp under the front panel
Shelves Number	6
Shelf Material	Wire steel with white colour plastic coating
Shelves Dimensions (W x D mm)	530 x 650
Shelf Adjustment Step	13 / 13
Shelf Adjustment Step Range (mm)	89
Maximum Shelf Quantity	13 / 13
Drawers with extractable slides	Optional
Drawer Adjustment Step	13 / 13
Drawer Adjustment Step Range (mm)	89
Maximum Drawer Quantity	13 / 13
Adjustable Steel Feet (from 135 to 160 mm)	4

## CONTROL PANEL

Display Type	LED
--------------	-----

CONTROL PANEL	
Access Password	No
Probe Type	Nr. 2 NTC
Alarm Signaling	Acoustic and visual
Alarm Indications	Codes
Adjustable High/Low Temperature Alarm	Yes
Adjustable Door Open Alarm	Yes
Power Loss Alarm	Yes
Probe Fault Alarm	Yes
Acoustic Alarm Silencing Options	Yes
Calibration	Yes
Alarm Memory	10
Dry Contact	Yes (NC)

ACCESSORIES
Open wire shelf
Stainless steel open wire shelf
Chromium plated open wire basket
Stainless steel drawer
Plastic drawer divider
Drawer Perspex front shield
Castors Ø 95 mm, 2 with brakes
Door key locking
Electronic door lock (available for ADVANCED control panel only)
Temperature chart recorder
Ballasted sensor for simulation of the product temperature alarm (available for ADVANCED control panel only)
Internal electrical socket
Porthole with cover Ø 18 mm

## ACCESSORIES

Porthole with cover Ø 45 mm

Internal spark-proofing

Back-up cooling unit (available for ADVANCED control panel only)

Refrigerant R452a

GSM/GPRS telephone dialer

Voltage 230V/1ph/60Hz

Voltage 115V/1ph/60Hz

Plug type A

Plug type B

Plug type G

Plug type I

Wooden crate packing

IQ Documentation

OQ Documentation

PQ Documentation



ESSE3 srl, Via Garibaldi 30  
14022 Castelnuovo D.B. (AT)  
Tel +39 011 99 27 706  
Fax +39 011 99 27 506  
e-mail: [danielec@esse3-medical.com](mailto:danielec@esse3-medical.com)  
web: [www.esse3-medical.com](http://www.esse3-medical.com)

